

AIR CONDITIONER ACM 11

FUNCTION

The ACM 11 Air Conditioner is a transportable unit, developed primarily to provide air conditioning in temporary or transportable buildings or tents. It is a small light weight unit made out of aluminium and built into a rigid steel frame. The unit is designed to be placed outside, with supply air and return air ducted to the tent. For field hospitals where a higher filtration than for normal accommodation is wanted, a dual filtration system for the internal air path is available.

The function of the ACM 11 is based on a cooling circuit and two powerful fans. The evaporator section contains the evaporator and a radial fan, which draws warm internal air of the tent through the cold evaporator and blows out the cooled air through the side or the top of the unit. The condenser section contains two condenser coils and a large axial fan, returning the heat taken from the internal air to the outside atmosphere.

The ACM 11 is equipped with an electric heating coil, to provide heating for example for night time when temperatures can fall under 20°C.

All sheet metal parts are protected against corrosion by a minimum 80µm top coat.

FEATURES

- Designed for optimal utilization of a standard 20" ISO container (30 pcs.)
- The ACM 11 is built into a strong metal frame with insulated panels where relevant, powder coated.
- Top finish painting is standard sand colour
- Designed for air conditioning when the temperature is above 20°C. It can provide cooling at ambient temperatures up to +60°C. Option with built in heating will heat when ambient temperature is below 20°C.
- Scroll compressor for a high degree of reliability and low noise level.
- Automatic phase surveillance
- Environment-friendly R134a refrigerant.
- HP/LP pressostat switches ensuring long compressor lifetime.
- Controlled by a room thermostat placed inside the tent (accessory)
- G3 filtration of the internal air
- Dual filters in front of internal air intake as an option
- Fresh air intake
- Four way fork lift handling.
- Easy strap down on air cargo pallets and stackable (two units on top of each other)
- Insulated flexible ducts Ø315 mm for exhaust and return air openings
- Low voltage control circuit
- CE-marked

ACCESSORIES

- Remote thermostat with 15m cable and auto cooling/heating selection
- Insulated, flexible duct Ø315x3000 mm incl. storage bag
- Uninsulated flexible duct Ø315x5000 mm incl. storage bag
- Air distribution duct Ø315x6000 mm
- F7 filter
- Trolley with wheels (more detailed description under "Accessories")
- 12 kW booster heater (more detailed description under "Accessories")





TECHNICAL DATA


Nato Stock Number w/o heat	NSN	TBD
Nato Stock Number with 8 kW heat and softstarter	NSN	4120-22-622-8737
Operating range, cooling	°C	20-60
Operating range, heating	°C	-32-(+20)
Airflow, internal, with ducts	m³/h	1700
Airflow, external	m³/h	3500
Nominal Cooling capacity*	kW/BTU	11/38000
Heating capacity optional	kW/BTU	8/27000
Power supply	V/Hz	3x400 / 50
Max. running current (cooling/heating)	A	15 / 16
Locked rotor amperage (LRA)**	A	65,5
Power consumption cooling (tested)	W	4200 (worst case 5600)
Power consumption heating (tested)	W	8800
Refrigerant / quantity	kg	R 134a / 4,0
Filter material	EN 779	G3 + optional
Protection class	IP	X5
Flex. air duct connection	Ømm	315
Noise level measured inside tent, 1 m from tent wall	dB(A)	55
Weight (without accessories)	kg	170

*Performance varies with varying conditions


** Soft starter available

UNIT COMPONENTS AND AIRFLOW

1	Condenser air intake
2	Condenser air discharge
3	Warm air intake
4	Dual filter system (optional)
5	Cooled air discharge
6	Duct coupling (Ø315mm)
7	Electric panel w. cover

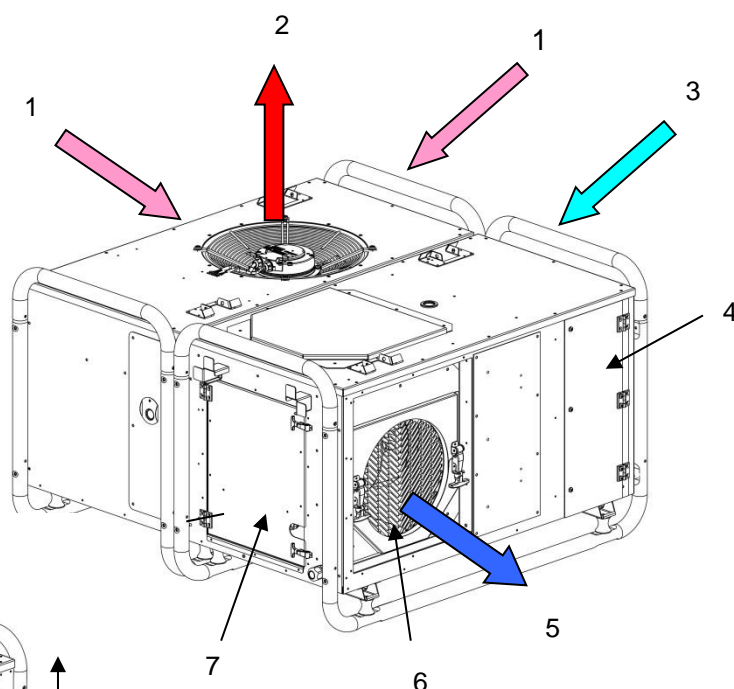

DIMENSIONS

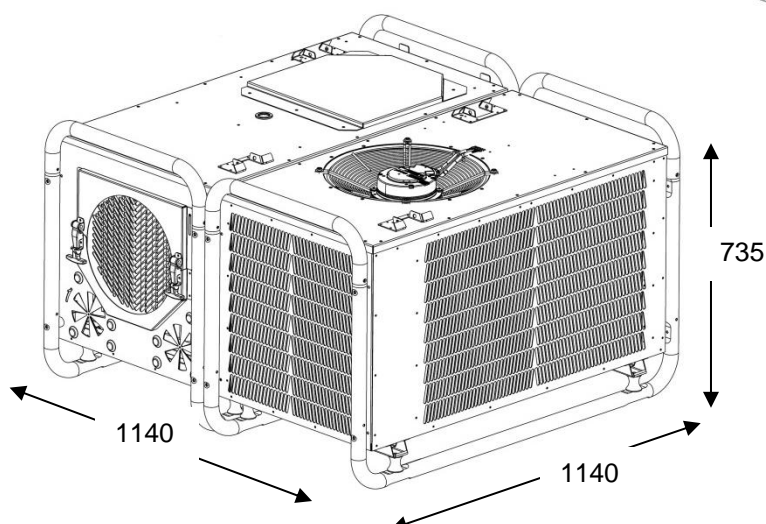

Version January 2014